


# PANTOGRAPHS

by Movie Tech

... premium lighting suspension!

MTS - Manually Operated Pantographs SZM 25-60

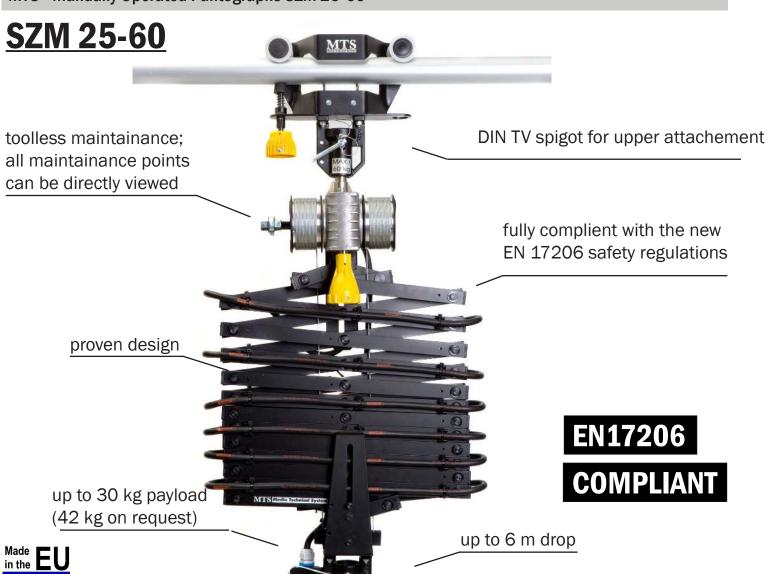









## PANTOGRAPHS

by MovieTech

... premium lighting suspension!

### MTS - Manually Operated Pantographs SZM 25-60



## **SZM 25-60**

- Transmission: dynamically self-locking drive, 1:20
- Supporting cables: 2 x d = 2mm
- Power outlet: 16 A Schuko socket (alternatively CEE 17)
- DMX XLR 5 socket (optional)
- Upper attachment: DIN TV spigot, d = 28 mm
- Load attachment: DIN TV socket, d = 29 mm
- Operated via operating pole SBV or motorized pole MSB 400
- Safety standards: DGUV Vorschrift 17 (former BGV C1/ VBG 70) and EN 17206 (former DIN 56950-2 and DIN 15560)

# EN17206 COMPLIANT

Manual operating pole SBV or motorized pole MSB



_	SZE 25	SZE 40	SZE 50	SZE 60
Item No. A) Schuko Version B) CEE Version	MTS0313250 MTS0312250	MTS0313400 MTS0312400	MTS0313500 MTS0312500	MTS0313600 MTS0312600
max. drop closed length	2,5 m 0,55 m	4 m 0,675 m	5 m 0,75 m	6 m 0,825 m
width	0,45 m 10.5 m	0,45 m	0,45 m	0,45 m
self weight max. payload DMX (MTS0312700)	30 kg (42 kg*) optional	13 kg 30 kg (42 kg*) optional	14,5 kg 30 kg (42 kg*) optional	16 kg 30 kg optional

\*payload can be increased upon request



#### MTS - Media Technical System

We – **MTS Media Technical System** – have now more than 25 years of experience in designing and manufacturing **premium quality lighting suspension** for stage and studio. Since 2006 we are part of the **MovieTech AG.** 

Our goal is to manufacture every single product with the **highest possible quality** and to **over-fulfill our customer's expectations.** We are proud to call many of the major broadcasting companies all around the globe our customer-base.

We produce all our products order-related in our **optimized production facility** and thus meet the specific requirements of every individual project. In combination with their reliability our products **simplify the daily work** on stage and in the studio.